

The *Batium* range controlled by *microprocessor* guarantees you the maximum effectiveness and security.



**15 ▶ 130 Ah**  
GEL/AGM/VRLA/LIQUIDE



The charge is **automatic/without supervision**.



50% shorter charge time compared to a traditional charger. Batium ensures an ultra-quick and safe charge, by providing a **constant average current** during "boost" phase.

Ref. **024502**

Ref. **024625**



Batium ensures a **100% charge** of all lead-acid batteries\* (IwUoU curve). A standard "automatic" charger, W2 or WU curve, charges up to 90% only.





Batium is a microprocessor controlled **smart charger**, that constantly analyses the state of the battery and regulates the charge according to the battery's needs.



**Deeply discharged batteries** that are still in a good state of health (eg : Lights on when the vehicle is stopped) could have a voltage as low as 1V. Batium can **charge from 2 volt**, whereas most chargers cannot.



**Protection of the on-board electronics.** No need to disconnect the battery from the vehicle. No risk of sparks or short-circuits, and no current is supplied to the clamps unless they are connected to the battery terminals.

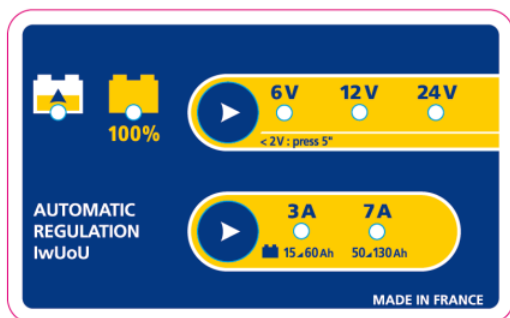

CE EN 60335-2-29

|         |      |           |     | EFFICACE /RMS | MOYEN/AVERAGE |       |       | FUSE |             |        |   |
|---------|------|-----------|-----|---------------|---------------|-------|-------|------|-------------|--------|---|
| 50/60Hz |      |           | Reg |               | Reg 1         | Reg 2 | Reg 3 |      |             |        |   |
| 230V    | 210W | 6-12-24 V | 2   | 11A           | 3A            | 7A    | -     | 15A  | 21x34x13 cm | 5,7 kg | - |